


## Aspöck LumEU Flex ECO Digital TW 520lm-24V

ARTICLE NO. 30-0701-167

Flexible LED-strip with IP 00 protection

### PRODUCT FEATURES

- Length 5000 mm
- Delivers luminous flux up to 520 lm/m
- Efficient heat management
- LED strips with tunable color temperature from 1800K to 6000 K
- Estimated lifetime L70 > 20.000 hours
- With high-quality 3M double adhesive tape



### PHOTOMETRIC DATA

Color Temperature	1800 ~ 6000 K
Light Color	Tunable White
Luminous Flux per Meter	1800K: 72 lm/m 3000K: 300 lm/m 6000K: 350 lm/m
CRI	>90
Beam Angle	120 °
Lifetime L70	20.000 hours


### ELECTRICAL DATA

Technology	IC
Type	SMD5050
Voltage	24 V DC
Electrostatic Discharge	800 V
Power per Meter	15 W/m
Operating Temperature	-20~+40 °C
Storage Temperature	-40~+80 °C
Protection	IP 00

### MECHANICAL DATA

Length PCB	5000 mm
Width PCB	10 mm
Height PCB	1.5 mm
Cutting Distance	83.33 mm
LED Distance	13.88 mm
Number of LEDs per Cut	6
Min. Bend Radius	6 cm
Max. Length*	5 m

\*The value given applies to the application of the rated voltage at the first module section. When using a supply line, the maximum operable length changes depending on the supply line length and its cross section.

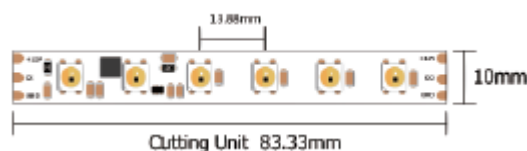

These data can have a tolerance value of +/-15%. Typing and printing errors reserved.